



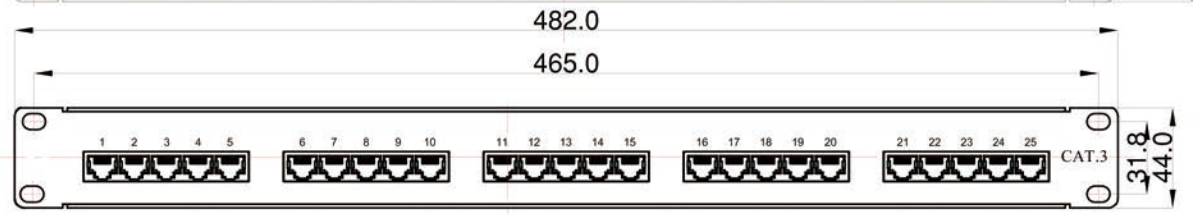
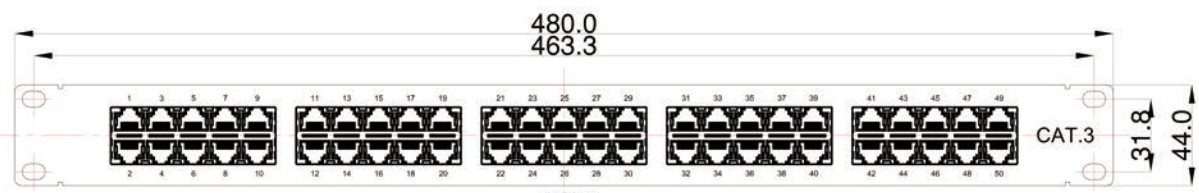


1 2 3 4 5 6 7 8 9 10 11 12 13

| MOLDING | |
|---------|----|
| LL | MM |

| DATE | REV. | REVISION | DRAFTING | CHECKED |
|------|------|----------|----------|---------|
| | | | | |
| | | | | |
| | | | | |

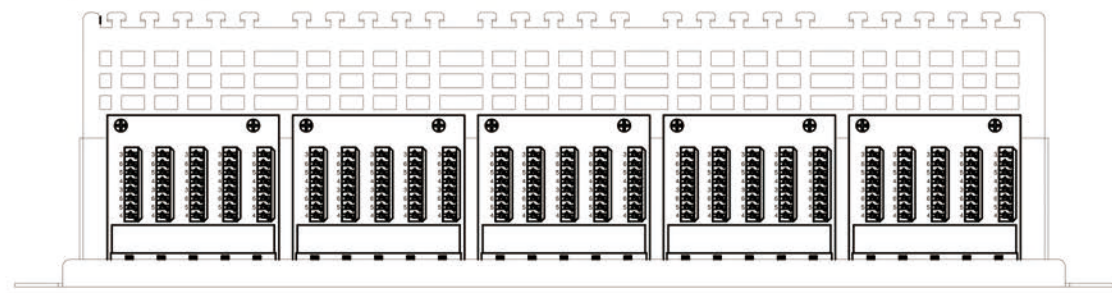

50 PORT



25 PORT

SPECIFICATION

- Patch Panel: 19", 1U, Telephone Panel with 50 ports
- RJ45 Jack
Housing Material: Engineering Plastic.
Contact Material: Phosphor Bronze, 3u" gold plated over Nickel plated in contact area Active Pin-out: 36,45
- Connector: 110 Connector---Body: Engineering Plastic.
Contact: Phosphor Bronze with Tin plated.
- P.C.Board: FR4, 1.6mm Double side.
- Insertion Force: 900gms for 8 contacts.
- Retention Strength : 7.7 kg between jack and plug.
- Durability : 750 Cycles contact resistance test check every 100 Cycles.Insertion cycles at 20 cycles/minute max.
- 4 sets M6 screw.
- RoHS Compliant.

ELECTRICAL

- Current rating: 1.5 Amps
- Insulation resistance: 500 MΩ
- Contact resistance: 20 mΩ
- DC resistance: 0.1 Ω
- Dielectric withstanding voltage: 1000 V

Unless specified on the drawing , tolerances are per the follows:

| | |
|-----|-------|
| X. | ±1.00 |
| .X | ±0.80 |
| .XX | ±0.50 |
| .X° | ±0.30 |
| X° | ±3.00 |

上海灵沛信息科技有限公司

| | | | | |
|----------|-------------------|----------|-------|-----|
| TITLE | 25口语音配线架/50口语音配线架 | | | |
| DRAW. NO | DRAW | DATE | | |
| SCALE | 1:1 | CHECK | DATE | |
| UNIT | mm | APPROVER | SHEET | 1:1 |

| | | | | | | | | | |
|----------|-------------|------|-------------------------------|--------------------------------|--------------------------------|------------|----|-----|--|
| Material | Part Number | Note | <input type="checkbox"/> RoHS | <input type="checkbox"/> Reach | <input type="checkbox"/> Other | Department | II | 3RD | |
|----------|-------------|------|-------------------------------|--------------------------------|--------------------------------|------------|----|-----|--|

1 2 3 4 5 6 7 8 9 10 11 12 13