


PIN/PAIR ASSIGNMENTS

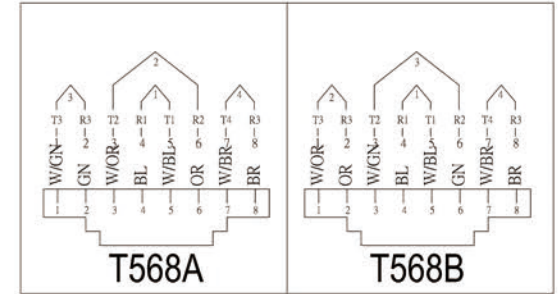

SPECIFICATION

- Patch Panel: 1U SECC/SGCC
- RJ45 Jack
Housing: Engineering Plastic .
Terminal: Phosphor Bronze, 3u", 15u", 50u" gold plated over Nickel plated in contact area Tin-lead over nickle in solder area.
- IDC
Housing: Engineering Plastic.
Terminal: Phosphor Bronze with Tin plated.
- P.C.Board: FR-4, T=1.6mm.
- Operation Temperature : -10°C to 60°C.
- Insertion Force: 900gms for 8 contacts.
- Retention : 7.7 kgs between jack and plug.
- Durability : 750 Cycles contact resistance test check every 100 Cycles. Insertion cycles at 20 cycles/minute max.
- Supports: T568A & T568B wiring compatible with Category 6A requirement .
- Tool: DUAL.

ELECTRICAL

- Current rating: 1.5 Amps
- Insulation resistance: 500 MΩ
- Contact resistance: 20 mΩ
- DC resistanc: 0.1 Ω
- Dielectric withstanding voltage: 500 V

Unless specified on the drawing , tolerances are per the fallows:

X.	±1.00
.X	±0.80
.XX	±0.50
.X°	±0.30
X°	±3.00

上海灵沛信息科技有限公司				
TITLE	超六类1U 24口非屏蔽配线架			
DRAW. NO	DRAW	DATE		
SCALE	1:1	CHECK	DATE	
UNIT	mm	APPROVER	SHEET	1:1